


**BUNKER**

# OSTRO LENTA

## LED BUNKER LIGHT

REPLACING TRADITIONAL  
CFL FITTINGS

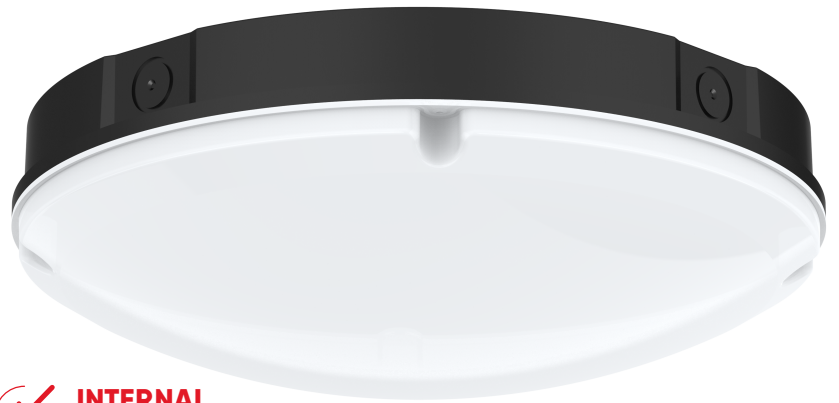

 **INTERNAL DRIVER**



### APPLICATIONS

Our OSTRO LENTA BUNKER is popular with health and aged care facilities due to it being fully sealed and easy to install.

### FEATURES & BENEFITS

- High lumen efficiency of 110lm/W.
- Tri-colour & Interchangeable CCT (3000K/4000K/6000K) with slide switch.
- IP65 waterproof.
- Full bezel, Grill bezel and Eyelid bezel ring covers available.
- upto 5 years warranty.
- Optional daylight linked control and motion sensing capabilities.

	12W	16W	20W
--	-----	-----	-----

## GENERAL

Model Number	OST-LENTA-12W-30 OD-3C-ND	OST-LENTA-12W-30 OD-3C-MS	OST-LENTA-16W-30 OD-3C-ND	OST-LENTA-16W-30 OD-3C-MS	OST-LENTA-20W-3 00D-3C-ND	OST-LENTA-20W-3 00D-3C-MS
Diameter (mm)	300mm					
Weight	0.695 KG					
Category	Bunker Light					
Lifetime (L70)	Reported: >36,000 hrs & Calculated: Up to 205,000 hrs					
IP & IK Ratings	IP65 IK10					
Warranty	5 Years					
Ring Covers	RingA/Full Bezel, RingB/Grill Bezel, RingC/Eyelid Bezel					
Storage Temperature	-20°C ~ 65°C					
Operating Temperature	-20°C ~ 40°C					

## OPTICAL

Beam Angle	120°					
Lumens	1170-1260lm	1570-1680lm	1750-2100lm			
LED Type	Hongli					
No. of LED's	120					
LED Colour Temp	3000K/4000K/6000K					
CRI	>80					

## ELECTRICAL

Driver Type	Internal					
Input Voltage	200-240 VAC, 50/60 Hz					
Power Factor	>0.9					
Inrush Current	N/A					
Output Voltage	60-72Vdc					
Output Current (Max.)	0.16A	0.21A	0.26A			
Dimming	TRIAC Dimmable option available					
Recommended Dimmers	Clipsal LED Dimmer 32ELEPM, Trader Dimpala Eclipse					
Sensor Capability	No	Yes	No	Yes	No	Yes

## COMPLIANCE




AS/NZS 60598.1  
AS/NZS 60598.2.1 ISO 9001

## SKU

## ORDERING

BUNKER OSTRO LENTA 12W 300mm 3C ND	9343907004654
BUNKER OSTRO LENTA 16W 300mm 3C ND	9343907004655
BUNKER OSTRO LENTA 20W 300mm 3C ND	9343907004656
BUNKER OSTRO LENTA MS 12W 300mm 3C ND	9343907004663
BUNKER OSTRO LENTA MS 16W 300mm 3C ND	9343907004664
BUNKER OSTRO LENTA MS 20W 300mm 3C ND	9343907004665
BUNKER OSTRO LENTA Ring A	9343907004657
BUNKER OSTRO LENTA Ring B	9343907004658
BUNKER OSTRO LENTA Ring C	9343907004659


# BUNKER



# OSTRO LENTA LED Bunker LIGHT

## LUMINOUS INTENSITY DISTRIBUTION FOR BUNKER LIGHT


### 12W/110LM/W

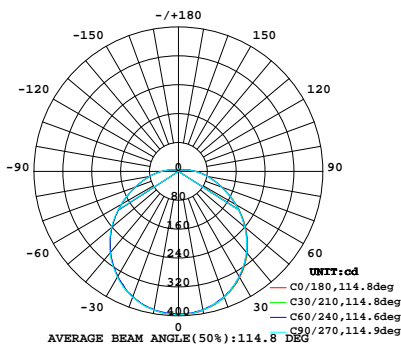

Flux out: 868.6 lm

3.281ft 1m	10.43, 37.84fc 108.6, 398.7lx	10.14ft 309.80cm
6.562ft 2m	2.597, 9.261fc 26.99, 99.61lx	20.28ft 618.80cm
9.843ft 3m	1.116, 4.116fc 11.99, 44.30lx	30.41ft 927.80cm
13.124ft 4m	0.6268, 2.315fc 6.747, 24.92lx	40.55ft 1226.00cm
16.4ft 5m	0.4012, 1.482fc 4.318, 15.93lx	50.69ft 1543.00cm
Height	Ray, Bmax	Angle: 114.17deg Diameter


### 16W/110LM/W

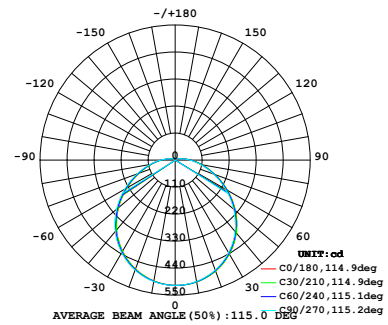

Flux out: 1129 lm

3.281ft 1m	12.93, 47.92fc 139.2, 515.6lx	10.14ft 309.80cm
6.562ft 2m	3.233, 11.98fc 34.86, 129.0lx	20.28ft 618.80cm
9.843ft 3m	1.437, 5.324fc 15.47, 57.31lx	30.41ft 927.80cm
13.124ft 4m	0.8083, 2.992fc 8.705, 32.24lx	40.55ft 1226.00cm
16.4ft 5m	0.5172, 1.917fc 5.569, 20.63lx	50.69ft 1543.00cm
Height	Ray, Bmax	Angle: 114.26deg Diameter

### 20W/110LM/W

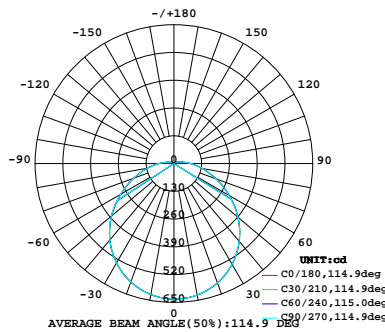

Flux out: 1363 lm

3.281ft 1m	16.99, 59.66fc 182.9, 682.2lx	10.07ft 306.94cm
6.562ft 2m	4.248, 14.91fc 45.73, 169.5lx	20.14ft 613.88cm
9.843ft 3m	1.888, 6.629fc 20.32, 71.35lx	30.21ft 920.82cm
13.124ft 4m	1.062, 3.729fc 11.43, 40.14lx	40.28ft 1227.76cm
16.4ft 5m	0.6797, 2.386fc 7.317, 26.69lx	50.35ft 1534.71cm
Height	Ray, Bmax	Angle: 113.82deg Diameter

120°

120°

# DIMENSIONAL DRAWINGS

**OST-LENTA-12W-300D-3C-ND/OST-LENTA-16W-300D-3C-ND/OST-LENTA-20W-300D-3C-ND**

